





| Specifications            | Dispenser D-160                                                                                                                                                                                                             |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Label Speed               | Max. 45 meters/min                                                                                                                                                                                                          |
| Power Supply              | 100-240V AC, 500W, 50-60 Hz                                                                                                                                                                                                 |
| I/O Interface             | Label Feeding Signal Input / Fault Signal Output, Busy Signal Output                                                                                                                                                        |
| Interface(optional)       | Modbus RTU, Modbus TCP, Ethernet TCP/IP, Can-Open, Start / Stop Signal                                                                                                                                                      |
| Connection Types          | Relay (NPN-PNP) - Photocell (NPN-PNP)                                                                                                                                                                                       |
| Advanced Properties       | Working with encoder or without encoder, printer can be connected (optional) blowermechanism can be connected (optional), transparent label sensor (optional), missing label error, label broken error, printer fault error |
| Operation                 | 4.3" / 272x480 pixel resolution touchscreen, user menu, setting menu, user start/stop, user administration, manual label feed                                                                                               |
| Language                  | Multi-Language System(TR,EN,IT,DE,RU,AR,FR,ES,CS,NL,CN,KO,PT,EL,FA)                                                                                                                                                         |
| Max Label Roll Diameter   | 300 mm                                                                                                                                                                                                                      |
| Reel Holder               | 76 mm                                                                                                                                                                                                                       |
| Max Label Width           | 160 mm                                                                                                                                                                                                                      |
| Weight                    | 30 kg                                                                                                                                                                                                                       |
| Printers Can Be Installed | SVM 32*53*107 mm Intermittent Printers                                                                                                                                                                                      |

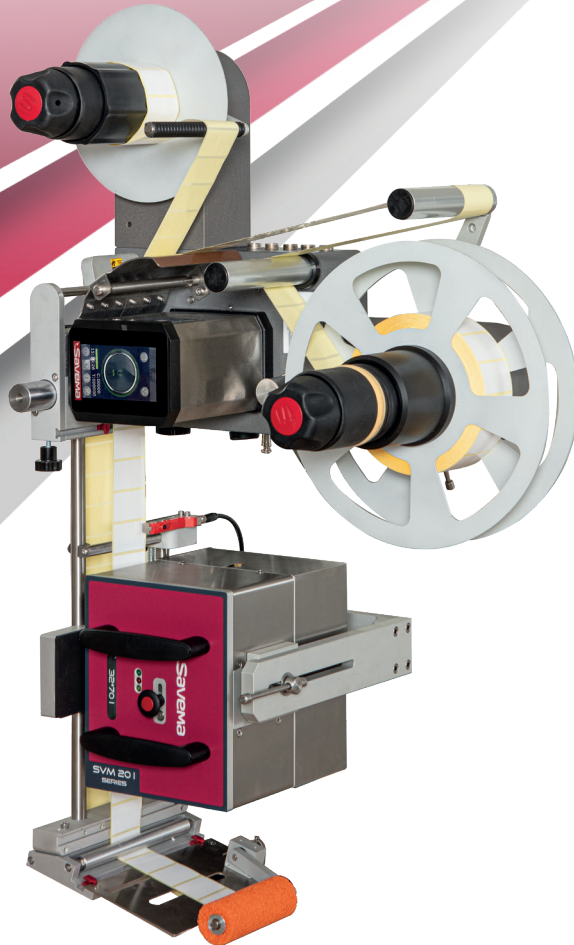

**SVM D-160 (HORIZONTAL)**

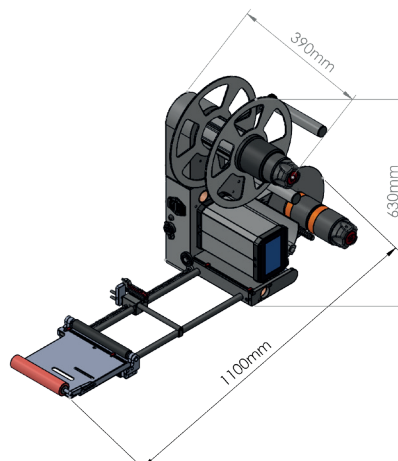

**SVM D-160 (VERTICAL)**

