

SVM 100-A1 FRICTION FEEDER

SVM 100-A2 VACUUM FEEDER


SVM 100-B CONVEYOR BELT



**SVM 100 - B
CONVEYOR BELT**



**SVM 100 - A1
FRICTION FEEDER**




**SVM 100 - A2
VACUUM FEEDER**




Conveyor Belt Specifications

Min. Width of Product	50mm (W) x 80mm (L)
Max. Width of Product	300mm (W) x 400mm (L)
Belt Speed	50-500 mm/sec.
Power	100-120V 50-60 Hz 200-240V 50-60 Hz
Weight	55 Kg
Operation Mode	Intermittent/Continuous

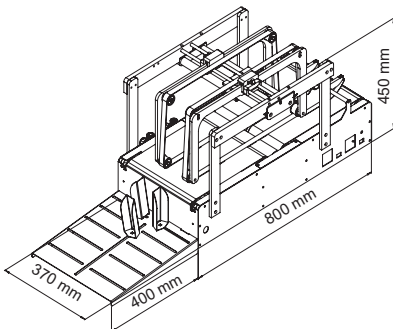

Friction Feeder Specifications

Min. Width of Product	50mm (W) x 80mm (L)
Max. Width of Product	300mm (W) x 400mm (L)
Min-Max Product Thickness	0,1 - 4 mm (depend on product type)
Belt Speed	600 mm/sec.
Power	100-120V 50-60 Hz 200-240V 50-60 Hz
Weight	20 Kg

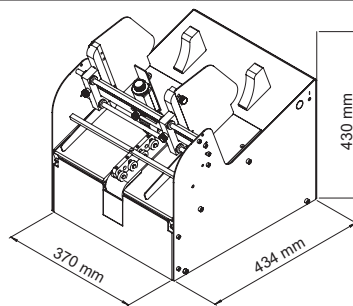

Vacuum Feeder Specifications

Min. Width of Product	100mm (W) x 100mm (L)
Max. Width of Product	300mm (W) x 320mm (L)
Power	100-120V 50-60 Hz 200-240V 50-60 Hz
Weight	14 Kg

