


SVM-RA4

High Speed Resin


Thermal transfer ribbon for Near Edge printers

- Excellent resistance to smudge and scratch
- High print darkness for perfect readability
- -12% plastics thanks to thinner PET

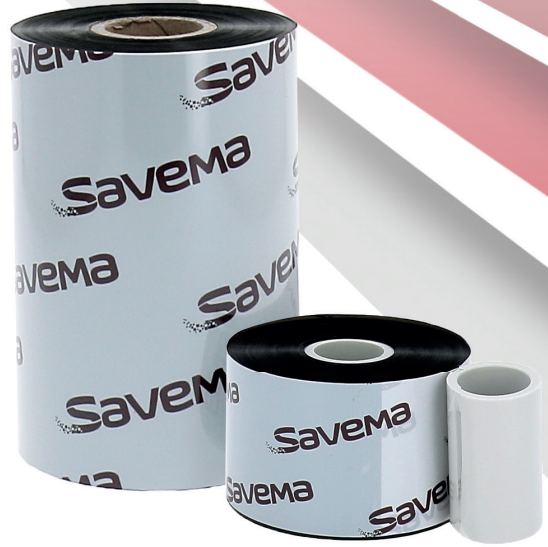


Blackness


Macbeth D19C (Optical Density by Reflection)

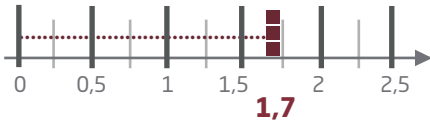

90° barcode

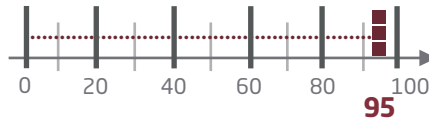


Sharpness

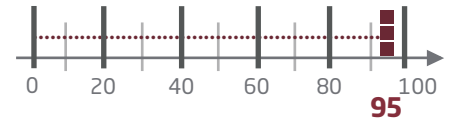


Substrate compatibility

Vellum paper	■ □ □	PP	■ ■ ■
Coated paper	■ ■ □	PE	■ ■ ■
Glossy coated	■ ■ □	PET	■ ■ ■


Printing speed

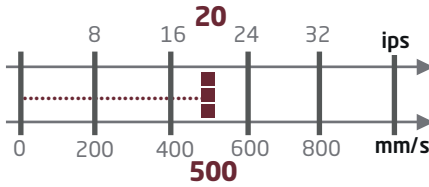


Printhead energy

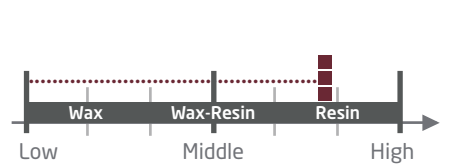


Smudge resistance



Heat resistance

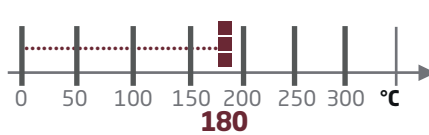

Solvent resistance

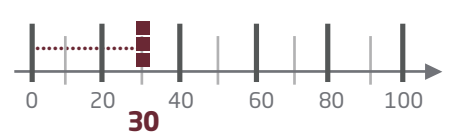

RIBBON STRUCTURE

Ink: Resin
Colour: Black
Melting point: 75°C
Ribbon thickness: <math>< 9\mu\text{m}</math>
PET film thickness: 4 μm

CERTIFICATIONS

REACH/SVHC 1907/2005/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Relative Humidity:
min 20%, max 80%

Savema

Büyükkayacak Organize Sanayi Bölgesi
Kuddusi Caddesi No: 4
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39
Fax: +90 332 239 23 19
info@savema.com.tr



www.savema.com.tr