

SVM-RD1

Resin


Thermal transfer ribbon for Near Edge printers

- High quality and very well-balanced performance for genral food packaging use
- Excellent resistance to scratch and alcohol, and high print sensitivity




Blackness


X-Rite 504(Optical Density by Reflection)

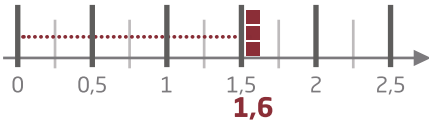

90° barcode




Sharpness




Label compatibility

Vellum paper	■ □ □	PP	■ ■ ■
Coated paper	■ ■ □	PE	■ ■ ■
Glossy coated	■ ■ □	PET	■ ■ ■


Printing speed

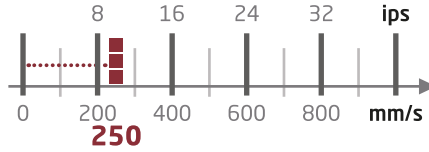


Printhead energy

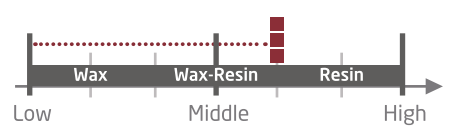


Smudge resistance



Heat resistance

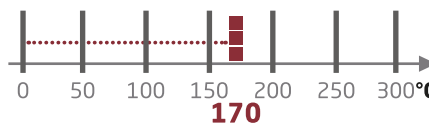

Solvent resistance

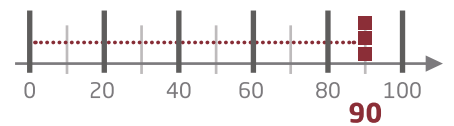

RIBBON STRUCTURE

Ink: Resin

Colour: Black

Melting point: 105°C

Ribbon thickness: 6.5±1.0µm

PET film thickness: 4.0±0.5µm

CERTIFICATIONS

RoHS EU 2015/863

Food Contact 1935/2004/EC

STORAGE CONDITIONS

12 month

Temperature: min 5°C, max 35°C

Humidity: min 30%, max 85%

Savema

Büyükakayıcı Organize Sanayi Bölgesi
Kuddusi Caddesi No:4
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39
Fax: +90 332 239 23 19
info@savema.com.tr



www.savema.com.tr