

# SVM-RAO

Resin


## Thermal transfer ribbon for Near Edge printers

- Good resistance to smudge and scratch
- Very good printing quality
- Good resistance to high temperature




### Blackness


Macbeth D19C (Optical Density by Reflection)

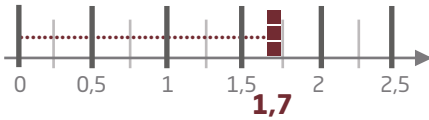

### 90° barcode

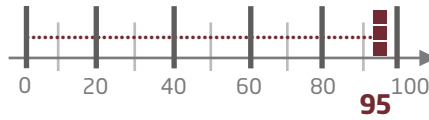


### Sharpness

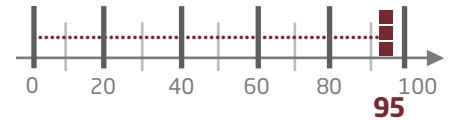


### Label compatibility

Vellum paper	■ □ □	PP	■ ■ ■
Coated paper	■ ■ □	PE	■ ■ ■
Glossy coated	■ ■ □	PET	■ ■ ■


### Printing speed

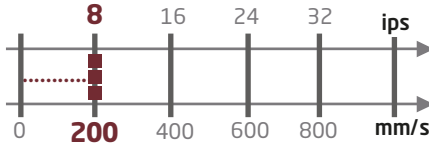


### Printhead energy

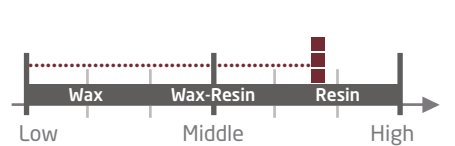


### Smudge resistance

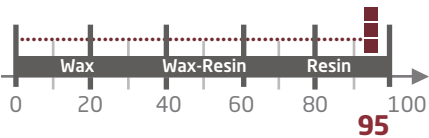

### Heat resistance

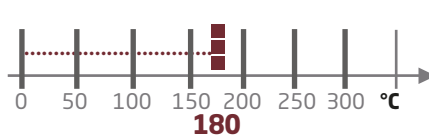

### Solvent resistance

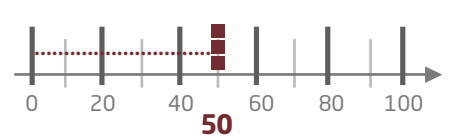

### RIBBON STRUCTURE

Ink: Resin  
Colour: Black  
Melting point: 80°C  
Ribbon thickness: <math>< 9\mu\text{m}</math>  
PET film thickness: 4,5  $\mu\text{m}$

### CERTIFICATIONS

REACH/SVHC 1907/2005/EC  
EC Food Contact 1935/2004/EC  
Heavy metals 2011/65/EU  
California Proposition 65  
Halogen restrictions

### STORAGE CONDITIONS

12 months  
Temperature: min 5°C, max 35°C  
Temperature: min 20%, max 80%

**Savema**

Büyükkayacak Organize Sanayi Bölgesi  
Kuddusi Caddesi No: 4  
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39  
Fax: +90 332 239 23 19  
info@savema.com.tr



www.savema.com.tr