

# SVM-WRA1

Wax-Resin


## Thermal transfer ribbon for Near Edge printers

- Good printing quality on all label substrates
- Compatible with high speed applications
- Excellent sharpness for 90° barcodes




### Blackness


Macbeth D19C (Optical Density by Reflection)

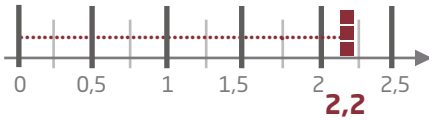

### 90° barcode

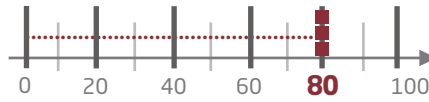


### Sharpness

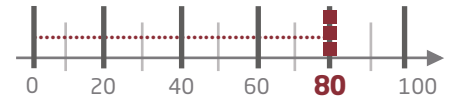


### Label compatibility

Vellum paper	■ ■ □	PP	■ ■ ■ ■
Coated paper	■ ■ ■ ■	PE	■ ■ ■ ■
Glossy coated	■ ■ ■ ■	PET	■ ■ ■ ■


### Printing speed

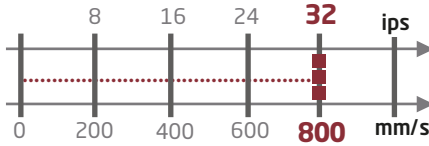


### Printhead energy

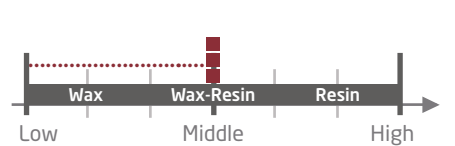


### Smudge resistance

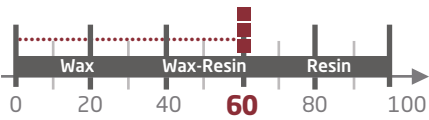

### Heat resistance

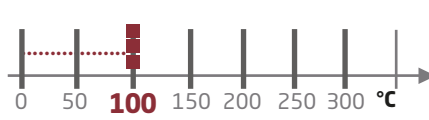

### Solvent resistance

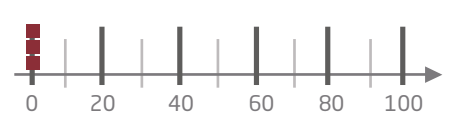

### RIBBON STRUCTURE

Ink: Wax-Resin

Colour: Black

Melting point: 80°C

Ribbon thickness: <8µm

PET film thickness: 4,5µm

### CERTIFICATIONS

REACH/SVHC 1907/2005/EC

EC Food Contact 1935/2004/EC

Heavy metals 2011/65/EU

California Proposition 65

Halogen restrictions

### STORAGE CONDITIONS

12 months

Temperature: min 5°C, max 35°C

Temperature: min 20%, max 80%

**Savema**

Büyükkayacak Organize Sanayi Bölgesi  
Kuddusi Caddesi No:4  
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39  
Fax: +90 332 239 23 19  
info@savema.com.tr



www.savema.com.tr