

# SVM-WRA2

Wax-Resin


## Thermal transfer ribbon for Near Edge printers

- Good print quality at high speed
- Good smudge resistance
- Lower operating costs thanks to a longer length ribbon




### Blackness


Macbeth D19C (Optical Density by Reflection)

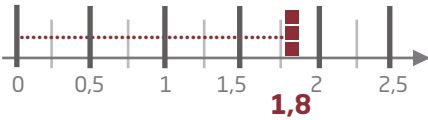

### 90° barcode




### Sharpness




### Label compatibility

Vellum paper	■ ■ ■ □	PP	■ ■ ■ ■
Coated paper	■ ■ ■ ■	PE	■ ■ ■ ■
Glossy coated	■ ■ ■ ■	PET	■ ■ ■ ■


### Printing speed

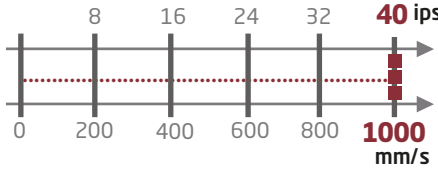


### Printhead energy

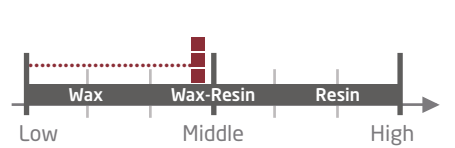


### Smudge resistance

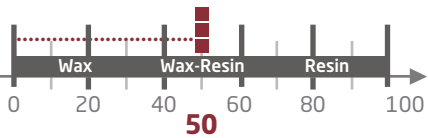

### Heat resistance

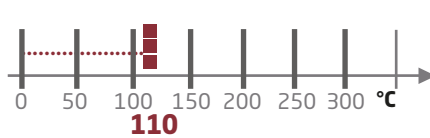

### Solvent resistance



### RIBBON STRUCTURE

Ink: Wax-Resin

Colour: Black

Melting point: 65°C

Ribbon thickness: <7µm

PET film thickness: 4µm

### CERTIFICATIONS

REACH/SVHC 1907/2005/EC

EC Food Contact 1935/2004/EC

Heavy metals 2011/65/EU

California Proposition 65

Halogen restrictions

### STORAGE CONDITIONS

12 months

Temperature: min 5°C, max 35°C

Temperature: min 20%, max 80%

**Savema**

Büyükkayacık Organize Sanayi Bölgesi  
Kuddusi Caddesi No:4  
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39  
Fax: +90 332 239 23 19  
info@savema.com.tr



www.savema.com.tr