

SVM-WRA3

Wax-Resin


Thermal transfer ribbon for Near Edge printers

- Very high resistance to smudge and scratch
- Excellent substrate compatibility
- Very good printing quality at high speed




Blackness


Macbeth D19C (Optical Density by Reflection)

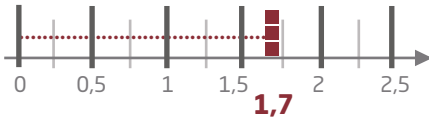

90° barcode

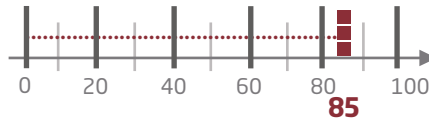


Sharpness

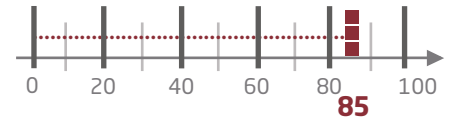


Label compatibility

Vellum paper	■ ■ ■ □	PP	■ ■ ■ ■
Coated paper	■ ■ ■ ■	PE	■ ■ ■ ■
Glossy coated	■ ■ ■ ■	PET	■ ■ ■ ■


Printing speed

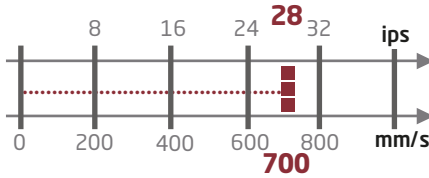


Printhead energy

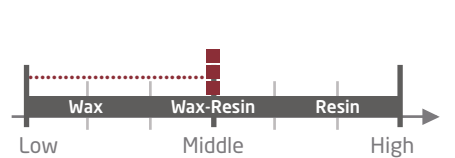


Smudge resistance



Heat resistance

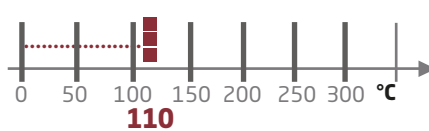

Solvent resistance



RIBBON STRUCTURE

Ink: Wax-Resin

Colour: Black

Melting point: 85°C

Ribbon thickness: <math>< 9\mu\text{m}</math>

PET film thickness: 4,5 μm

CERTIFICATIONS

REACH/SVHC 1907/2005/EC

EC Food Contact 1935/2004/EC

Heavy metals 2011/65/EU

California Proposition 65

Halogen restrictions

STORAGE CONDITIONS

12 months

Temperature: min 5°C, max 35°C

Temperature: min 20%, max 80%

Savema

Büyükkayalık Organize Sanayi Bölgesi
Kuddusi Caddesi No:4
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39
Fax: +90 332 239 23 19
info@savema.com.tr



www.savema.com.tr