

SVM-WRD1

Wax-Resin


Thermal transfer ribbon for Near Edge printers

- Suitable for a variety type of flexible packaging films
- Good resistance to scratch and smudge




Blackness


X-Rite 504(Optical Density by Reflection)



90° barcode

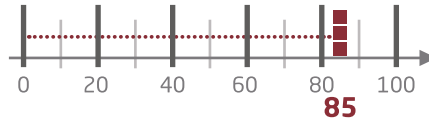


Sharpness




Label compatibility

Vellum paper	■ ■ ■	PP	■ ■ ■
Coated paper	■ ■ ■	PE	■ ■ ■
Glossy coated	■ ■ ■	PET	■ ■ ■


Printing speed

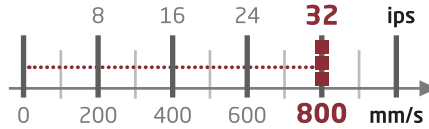


Printhead energy

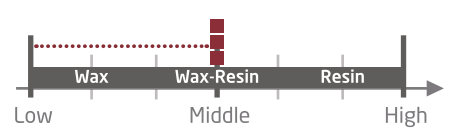


Smudge resistance

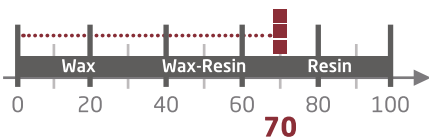

Heat resistance

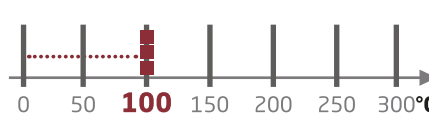

Solvent resistance

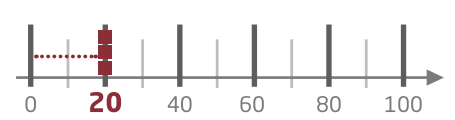

RIBBON STRUCTURE

Ink: Wax-Resin

Colour: Black

Melting point: 80°C

Ribbon thickness: 6.5µm±1.0µm

PET film thickness: 4.0±0.5µm

CERTIFICATIONS

RoHS EU2015/863

REACH - SVHC

Conflict Minerals Free

Contains No Animal Content

PFOS & Halogen Free

STORAGE CONDITIONS

12 month

Temperature: min 5°C, max 35°C

Humidity: min 30%, max 85%

Savema

Büyükçayır Organize Sanayi Bölgesi
Kuddusi Caddesi No:4
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39
Fax: +90 332 239 23 19
info@savema.com.tr



www.savema.com.tr