

SVM-RA1

Resin


Thermal transfer ribbon for Near Edge printers

- Excellent resistance to smudge and scratch
- Excellent printing quality
- Good resistance to high temperature




Blackness


Macbeth D19C (Optical Density by Reflection)

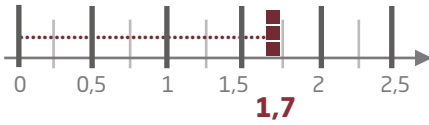

90° barcode

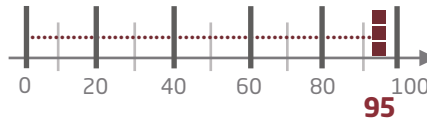


Sharpness

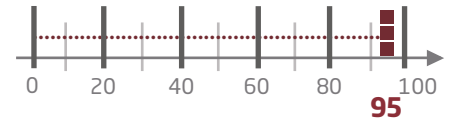


Label compatibility

| | | | |
|---------------|-------|-----|-------|
| Vellum paper | ■ □ □ | PP | ■ ■ ■ |
| Coated paper | ■ ■ □ | PE | ■ ■ ■ |
| Glossy coated | ■ ■ □ | PET | ■ ■ ■ |


Printing speed

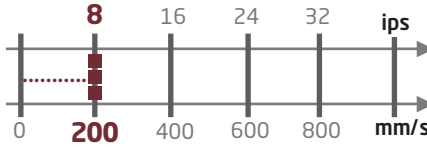


Printhead energy

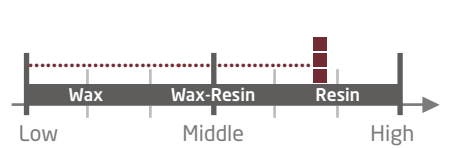


Smudge resistance

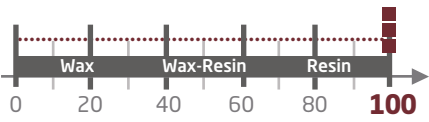

Heat resistance

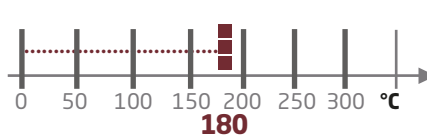

Solvent resistance

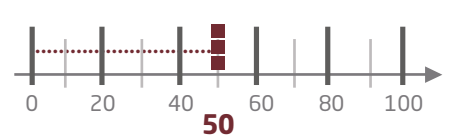

RIBBON STRUCTURE

Ink: Resin
Colour: Black
Melting point: 80°C
Ribbon thickness: $9\mu\text{m}$
PET film thickness: 4,5 μm

CERTIFICATIONS

REACH/SVHC 1907/2005/EC
EC Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen restrictions

STORAGE CONDITIONS

12 months
Temperature: min 5°C, max 35°C
Temperature: min 20%, max 80%

Savema

Büyükkayacak Organize Sanayi Bölgesi
Kuddusi Caddesi No: 4
SELÇUKLU / KONYA / TÜRKİYE PK: 42280

Tel : +90 332 239 23 39
Fax: +90 332 239 23 19
info@savema.com.tr



www.savema.com.tr